

FIG. 2

H323-UU-PDU ::= SEQUENCE

{

h323-message-body CHOICE

{

setup

callProceeding

connect

alerting

information

releaseComplete

facility

progress

empty

},

305 nonStandardData

....

h4501SupplementaryService

h245Tunneling

h245Control

nonStandardcontrol

300

Setup-UUIE,

CallProceeding-UUIE,

Connect-UUIE,

Alerting-UUIE,

Information-UUIE,

ReleaseComplete-UUIE,

Facility-UUIE,

Progress-UUIE,

NULL--used when a FACILITY message is sent,

--but the Facility-UUIE is not to be invoked

--(possible when transporting supplementary

-- services messages)

NonStandardParameter OPTIONAL, 306

SEQUENCE OF OCTET STRING OPTIONAL

--each sequence of octet string is defined as one

--h4501SupplementaryService APDU as defined

--in Table 3/H.450.1

BOOLEAN,

--if TRUE, tunneling of H.245 messages is enabled

SEQUENCE OF OCTET STRING OPTIONAL

--each octet string may contain exactly

--one H.245 PDU

SEQUENCE OF NonStandardParameter OPTIONAL

304

FIG. 3A-1

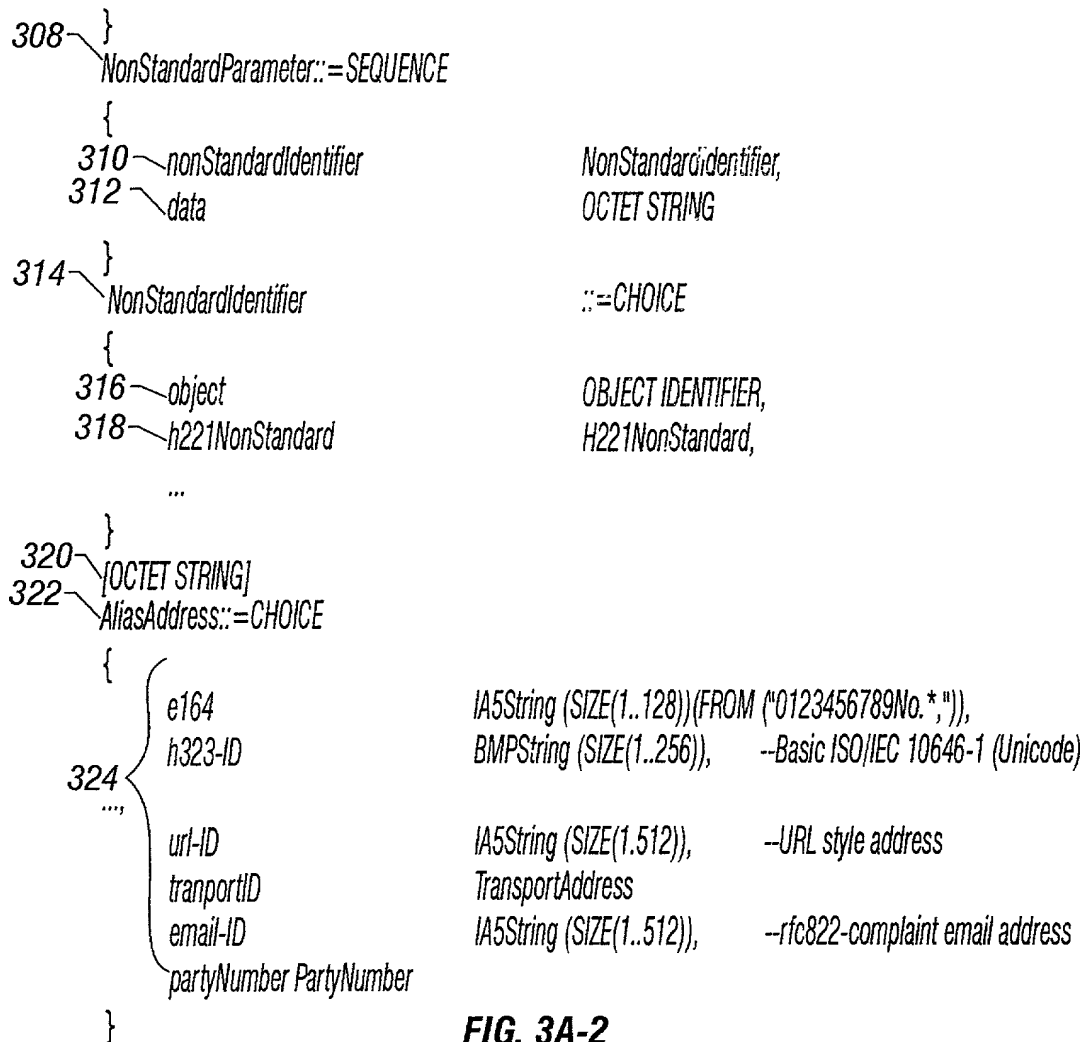


FIG. 3A-2

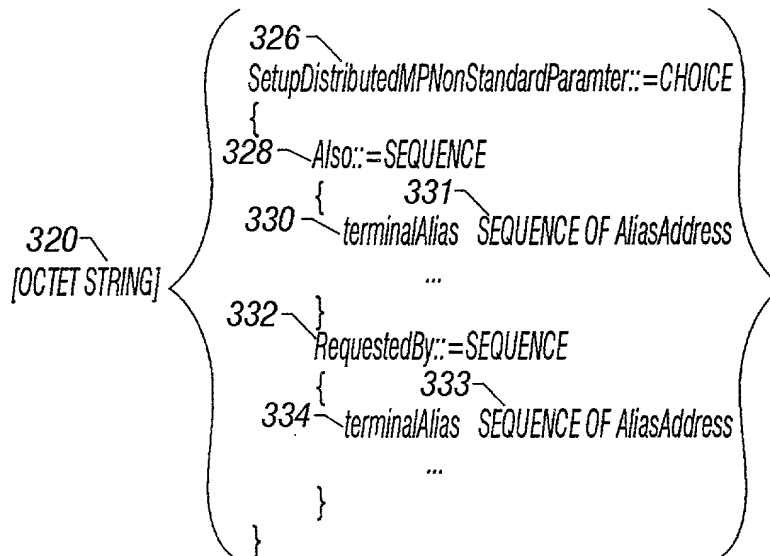


FIG. 3B

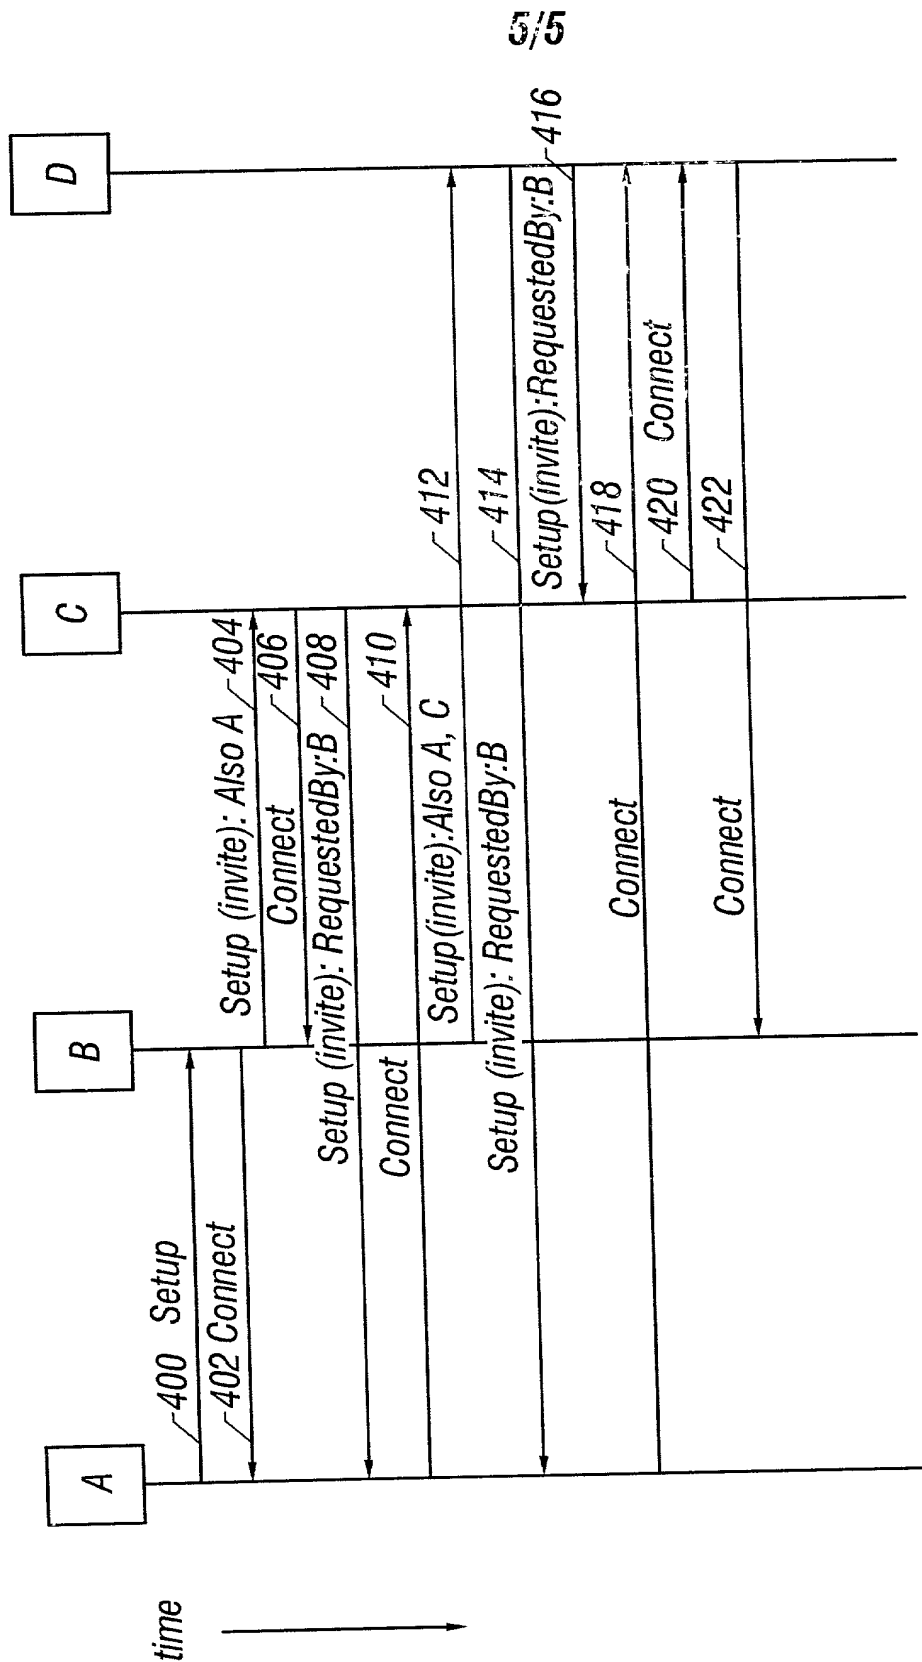


FIG. 4